

HA-70D Photoelectric Beam Detector




- Indoor / outdoor use
- Dual beam, pulsed infrared, sealed optics
- Variable beam interruption time
- Includes wall/pole mounting hardware

Specifications

Specification	HA-70D
Coverage, Outdoor/Indoor	70 ft / 140 ft
Sensing Type	Pulse Infrared Beam
Interruption Time for Alarm	50 msec. to 500 msec.
Relay Output	ISPDT Dry Contact 120 VAC, 0.5 A; 24 VDC, 1A (resistor load)
Alarm Duration	2 sec. \pm 1 sec.
Adjustable Alignment, Vertical	10° (\pm 5°)
Adjustable Alignment, Horizontal	180° (\pm 90°)
Supply Voltage	10 VDC to 26 VDC, or 8 VAC to 18.5 VAC
Indicator LED	Transmitter: Green LED On in transmitting condition Receiver: Green LED ON in normal condition; Red LED On in alarm condition
Power Consumption (12 VDC Input)	Transmitter: 7 mA max. Receiver: 25 mA max.
Tamper	Integral
Operating Temperature	-13° to 131° F (-25° to 55° C)
Connection	Terminal
Case Material	Black polycarbonate
Mounting	Wall or pole mount
Weight	31.39 oz

Features

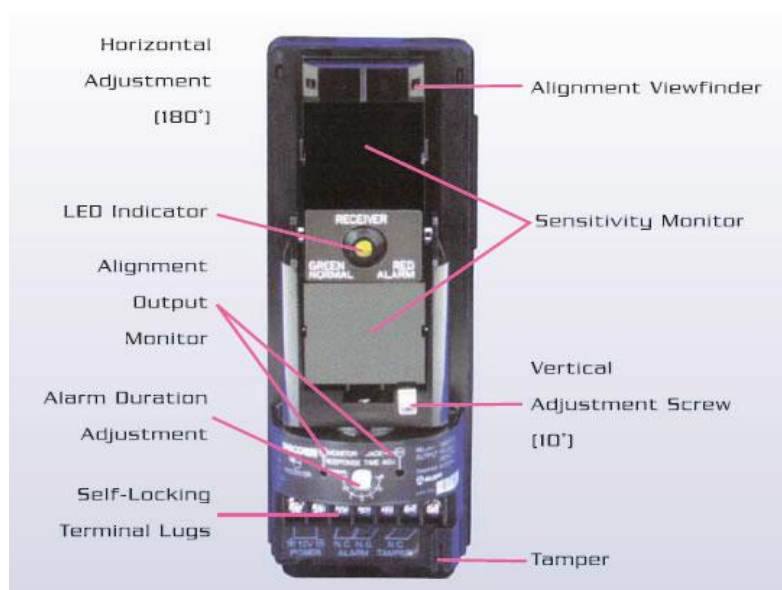

Transmitter & Receiver Dual Beam Combination

